



Slim Vehicle Power Unit RV-1200S

Specifications:

Model	RV-1200S
Refrigerant	R-404A
Charge (kg)	3.1
Compressor	
Model	TK31
Cooling Capacity(W)	
30/0 C°	10300
30/-20 C°	5300
Heating Capacity(W)	
-10/2 C°	6500
Evaporator Fan Performance	
Flow rate (@ 0 static pressure, m ³ /h)	3340
Velocity (m/s)	3.5
Current consumption on the road (A)	
24 VDC	39.5
Weight(kg)	
Condenser	50
Evaporator	46
Compressor	10.7

Key Feature:

More Capacity

- Optimized System Design
- New evaporator Design



More Reliability

- Optimized Compressor Design
- Long-life (10, 000 hrs) and One-piece Fans

More Flexibility

- Slim Condenser

Size(mm):

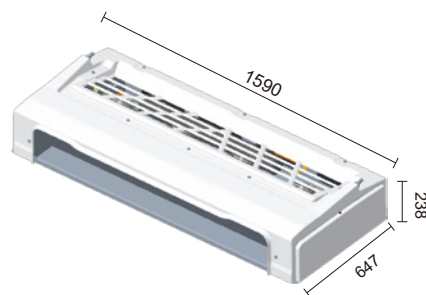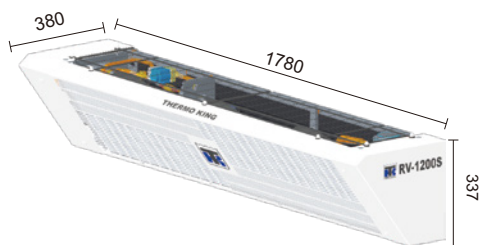

Asia Pacific Headquarters & China Office

8-12F, L'Avenue Shanghai,
99 Xianxia Road, Shanghai, 200051, P.R.C
Tel: +86 21 2221 5000
Fax: +86 21 2221 5409

Global Headquarters

314 West 90th Street
Minneapolis, Minnesota, 55420, U.S.A.
Tel: +1 952 887 2200
Fax: +1 952 887 2529



Thermo King customer service hotline



800-820-2828



400-820-7972

TRANE
TECHNOLOGIES